


Split Inverter Ducted



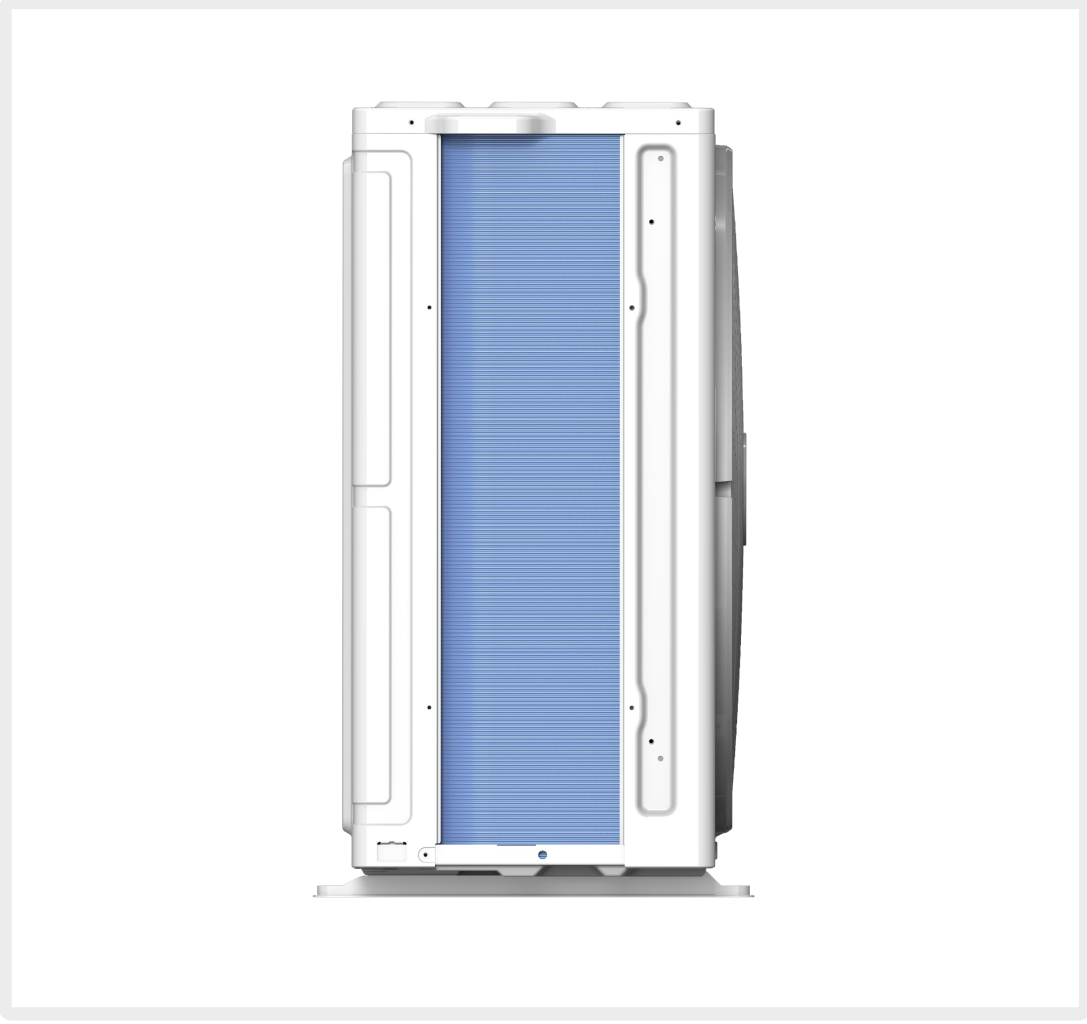

Series	Split Inverter Ducted
Model	WINVDUCT-15
QCC Registration	Performace
Indoor Model	ALTMD-H18/NDR1MB-1
Outdoor Model	ALT-H18/NDR1B(U)-1
Capacity	1,5 Ton
Regoin	UAE

Features

DC Inverter

Built-In Drain Pump

Fresh Air Intake (optional)

Thermostat

IR Remote

Wi-Fi

Split Inverter Ducted

Power Supply	Power Factor(T3)
220-240,50/60,1 (V~,Hz,Ph)	0,92 (-)

Capacity

Cooling(T3)	Cooling(T3)
16000 (Btu/h)	4,68 (kW)

Electric Data

Rated Cooling Power Input(T3)	Rated Cooling Current(T3)
1860 (W)	8,79 (A)

Performance

EER(T3)	SEER(T3) (International)
2,52 (W/W)	/ (W/W)
8,5 (Btu/h)	/ (Btu/h)

Indoor Unit

Indoor Air Flow (Hi/Mi/Lo)	
1130/910/780 (m3/h)	665/535/459 (CFM)

Noise Level (Hi/Mi/Lo)	42/39/38 (db(A))
External Static Pressure (Standard)	25 (Pa)
External Static Pressure (Range)	0~80
Net Dimension (W*D*H)	1000X700X245 (mm)
Packing Dimension (W*D*H)	1230X830X300 (mm)
Structure platform	M3 (-)
Net Weight	30 (Kg)
Gross Weight	36(Kg)

Refrigerant Pipe

Liquid Side	Φ 6,35 (mm)
Gas Side	Φ 12,7 (mm)
Drainage	DN25 (mm)

Operation Temperature Range	16~32 (°C)
Wired Controller	XK05 (-)

Split Inverter Ducted

Outdoor Unit

Power Supply	Max. Input Consumption
220-240, 50/60, 1 (V~,Hz,Ph)	2800 (W)

Compressor

Model	C-6RZ146H3DEF (-)
Type	ROTARY (-)
Brand	SANYO (-)
Capacity	4720 (W)
Input	1120 (W)
Rated Current	3,73 (A)
Thermal Protection temp.	115 (°C)

Noise Level	56 (dB(A))
-------------	------------

Weight

Net	40 (kg)
Gross	44 (kg)

Air Flow Volume	
3500 (m3/h)	2059 (CFM)

Dimension

Net(W×D×H)	900×360×700 (mm)
Packing(W×D×H)	1020×430×760 (mm)
structure platform	2.3PA (-)

Refrigerant Type/Quantity

Type	R410a (-)
Charged Volume	1300 (g)

Refrigerant Pipe

Liquid Side	Φ6,35 (mm)
Gas Side	Φ12,7 (mm)
Max.Length	30 (m)
Max.Height	15 (m)