
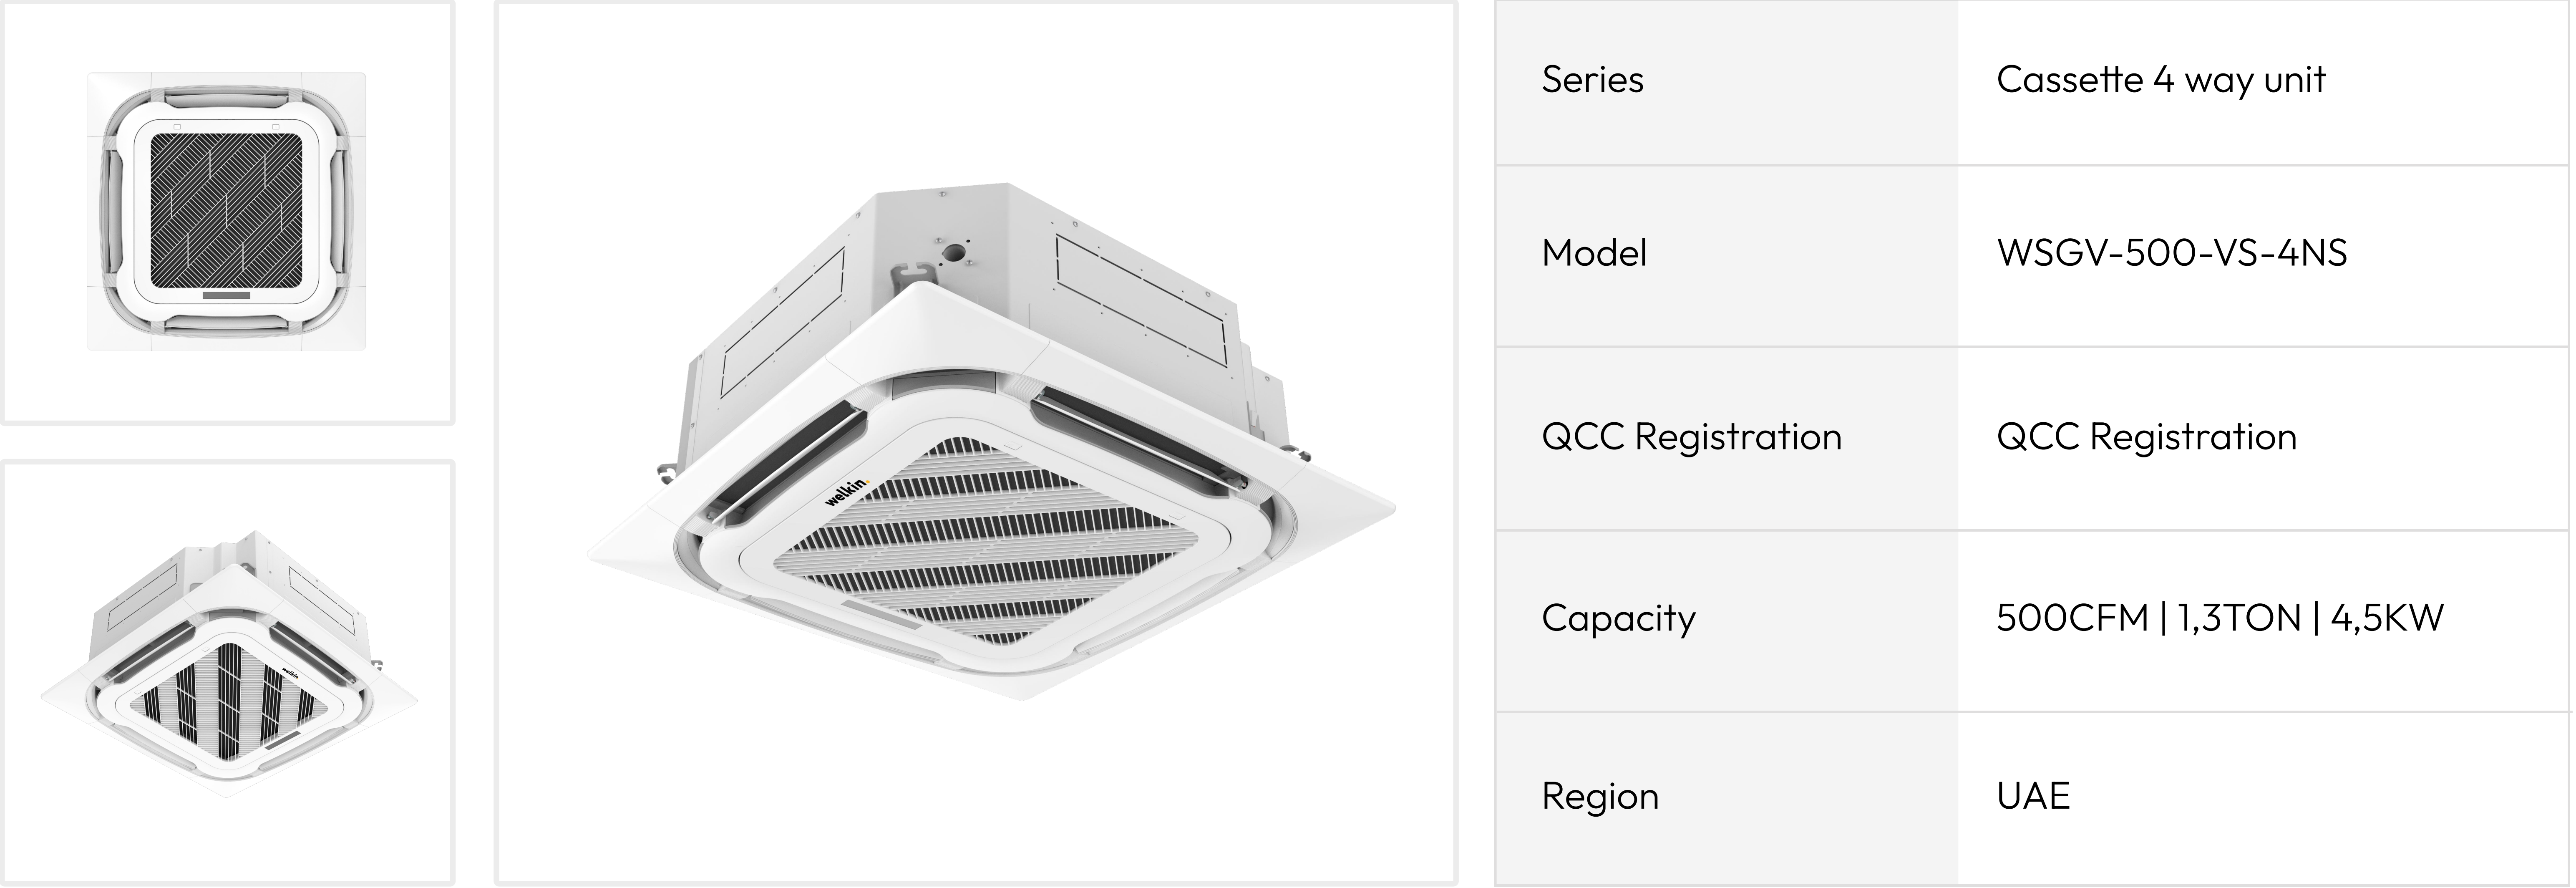


Cassette 4 way unit



Features

Return AIR Plenum and Filter Air Standard

Adjustable ESP

External Static Pressure

Cassette 4 way unit

Power Supply	220~240V,50Hz,1 (V~,Hz,Ph)	Air Flow Volume (H/M/L Speed)	
Cooling Capacity	4500/3600/3060 (w)	500/429/353 (CFM)	850/730/600 (m3/h)
Heating Capacity	6750/5940/5200 (w)	Indoor Coil	
Indoor Fan Motor		Number Of Row	2
Type	Low noise 3-speed fan motor (XD30B)	Tube Pitch(a)x Row Pitch(b)	20.5×12.7 (mm)
Number of motor	1	Fin Pitch	1,5 (mm)
Output Power	76 (W)	Fin Material	Hydrophilic aluminum fin
Capacitor	2.5 (uF)	Tube Outside Dia.And Material	φ7， Inner grooved (mm)
Indoor Fan		f.Coil Length x Height x Width	1322*205*25.4 (mm)
Number of Fan	1	Dimension	
Type	Centrifugal wind wheel (White material)	Net Dimension (body)	570×570×260 (mm)
Water Flow Volume	0,94 (m3/h)	Packing Dimension(body)	650×650×290 (mm)
Hydraulic Resistance	29 (Kpa)	Net Dimension (Panel)	650×650×55 (mm)
Max.Working pressure	1,6 (Mpa)	Packing Dimension (Panel)	710×710×80 (mm)
Weight		Noise Level	≤45 (dB(A))
Panel Net/Gross	3/5 (kg)	Drain Pipe	DN20 (mm)
Body Net/Gross	18/20.3 (kg)	Inlet/Outlet Water Pipe	DN20 (mm)
Wiring specification			
Power Wiring (FCU)	3×1 (mm2)		